



JK SEWAGE PUMPS

- Liquid temperature : 0~40°C / 32~104°F
- HP range : 1/2~7.5HP / 0.4~5.5KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP68
- Maximum depth : 8M

Features

- 1、Non-clogging vortex impeller design.
- 2、Suspended impeller and high efficacy flow channel design, no blocking. The pass solid is 50mm.



Specification


Model No.	Output HP	Output KW	Outlet mm	Outlet inch	Pass Solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head 3M 6M 9M 12M 15M	Max Head(M)	Dimension L x W x H(mm)	Weight Kg
JK-05	1/2	0.4	50	2"	30	320	285 190	-	223 x 132 x 395	14
JK-10	1	0.75	50	2"	30	400	360 270 160	-	223 x 132 x 425	21
JK-20	2	1.5	80	3"	35	620	600 550 490 410 280	18	390 x 210 x 530	32

Model No.	Output HP	Outlet KW	Pass Solid Dia(mm)	Max Flow(LPM)	LPM Flow @ Head				Max Head(M)	Dimension L x W x H(mm)	Weight Kg			
					3M	5M	10M	15M	20M					
JK-30	3	2.2	80	3"	35	780	755	720	610	420	-	18	390 x 210 x 550	34
JK-50	5	3.7	100	4"	45	1100	1050	980	800	590	250	22	525 x 250 x 635	45
JK-75	7.5	5.5	100	4"	50	1200	1170	1120	960	770	490	24	525 x 250 x 675	54

Applications



- 1、Industrial sewage discharge

Sectional View

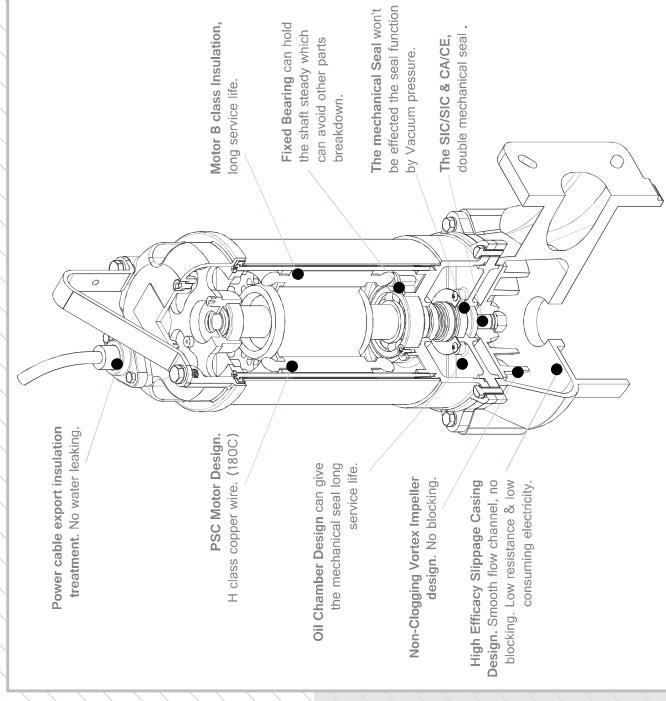

Standard Accessories

Model No.	Accessories	Pedestal Type
JK-05	Flange, Hose connection	N/A
JK-10	Elbow, Flange	TOS-S2
JK-20	Elbow, Flange	TOS-S3
JK-30	Elbow, Flange	TOS-L3
JK-50	Elbow, Flange	TOS-L4
JK-75	Elbow, Flange	TOS-L4



Dimension

Model	L	L1	L2	W	W1	H	H1	H2	H3	H4	PCD	G
JK-10	320	187	103	162	145	460	380	120	160	185	117	2
JK-20	387	255	103	210	145	560	485	122	160	185	117	3
JK-30	387	255	103	210	145	580	505	122	160	185	117	3
JK-50	475	288	183	216	240	630	535	160	210	240	155	4
JK-75	475	288	183	216	240	660	565	160	210	240	155	4

