



SMP

SWIMMING PUMP

- Liquid temperature : 5~50°C / 41~122°F
- HP range : 1~3HP / 0.75~2.2KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP55
- Maximum suction : 1.5M

Features

1. No rusty issue.
2. Large flow design, efficient work.
3. Union design, easy to clean and install.
4. Pre-filter can filter some foreign matters at first.



Applications

1. Pool and SPA system
2. Aquaculture circulating water filtration




Dimension

Model	Dimension									
	W	W1	L	L1	L2	H	H1	H2	H3	
SMP-10	mm	mm	mm	mm	mm	mm	mm	mm	mm	
SMP-20	160	122	465	298	215	234	215	100	151	
SMP-30	283	180	684	456	288	362	355	160	263	
SMP-30	283	180	684	456	288	362	355	160	263	

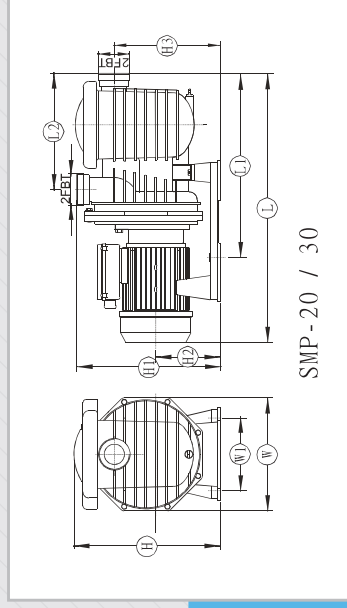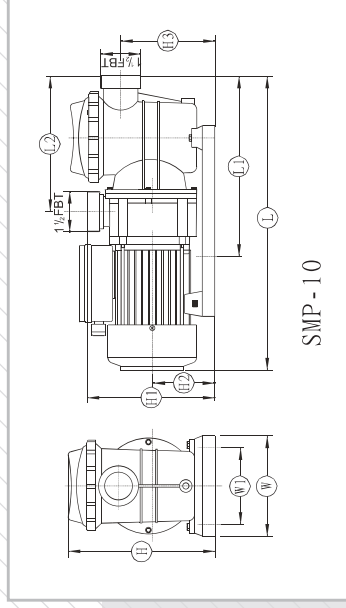

Curve

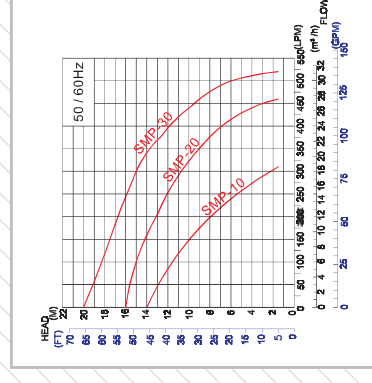

Standard Accessories

Model No.	Accessories
SMP-10	Hose connection
SMP-20	Hose connection
SMP-30	Hose connection



Specification

Model No.	Output		Outlet		Pass solid (mm)	Max Flow(LPM)	LPM Flow @ Head				Max Head(M)	Dimension L x W x H(mm)	Weight Kg	
	HP	KW	mm	inch			3M	6M	9M	12M				15M
SMP-10	1	0.75	40	1-1/2"	N/A	310	290	240	175	85	-	14	495 x 180 x 295	8.5
SMP-20	2	1.5	50	2"	N/A	460	450	415	350	250	100	16	700 x 295 x 420	18.5
SMP-30	3	2.2	50	2"	N/A	520	515	500	460	395	300	20	700 x 295 x 420	24.5