



SW220 / 320 / 420

CENTRIFUGAL PUMP

- Liquid temperature : 0~70°C / 32~158°F
- HP range : 2~4HP / 1.5~3KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP55
- Maximum suction : 2M

Features

1. All the material is stainless steel. No rusty issue.
2. Stainless steel close impeller & High head.
3. It can endure light acid and alkali.



Specification


Model No.	Output		Outlet	Max Flow(LPM)	LPM Flow @ Head						Max Head(M)	Dimension	Weight
	HP	KW			6M	9M	12M	15M	18M	21M	24M		
SW-220(T)	2	1.5	2"	630	600	550	485	410	320	200	24	380 x 195 x 265	24
SW-320(T)	3	2.2	2"	650	640	620	590	550	500	420	300	415 x 195 x 242	25
SW-420(T)	4	3	2"	680	670	650	620	585	540	480	380	432 x 195 x 242	28

Applications

1. Gardening & Sprinkling
2. Air conditioner, cleaning and heating system
3. Fluid of PH6-8 pump application
4. Pool system
5. Filtration system
6. Farm irrigation

Dimension

Model	Dimenison									
	L	L1	L2	L3	W	W1	H	H1		
SW-220(T)	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
SW-320(T)	378	255	123	82	193	190	258	125		
SW-420(T)	415	255	160	82	193	190	258	125		
SW-420(T)	432	255	177	82	193	190	258	125		

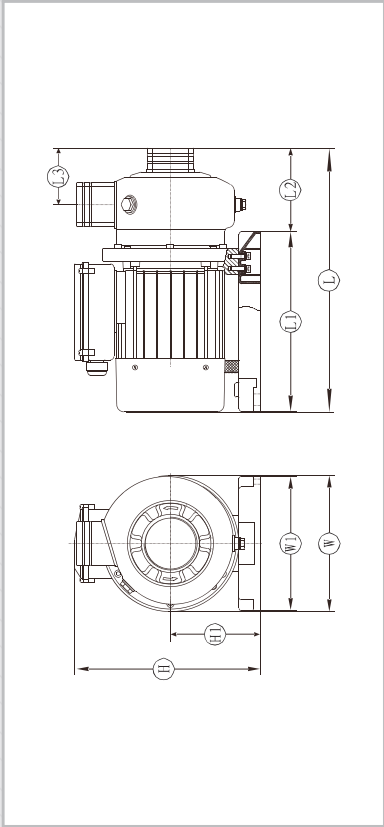

Curve

