

SW-60 120 250

STAINLESS STEEL

CENTRIFUGAL PUMP



- Liquid temperature : 0~70°C / 32~158°F
- HP range : 1/2~2-1/2HP / 0.4~1.85KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection calss : IP55
- Maximum suction : 8M

Features

- 1 - Clean water: all the material contacting water is stainless steel.
- 2 - Low noise: new designed vortex fan can reduce the voice.
- 3 - Suitable for outdoor environment(IP55).
- 4 - High quality mechanical seal can endure the high temperature up to 90°C.
(SW-120S/250S)

Applications

- 1 - Air conditioner cooling system
- 2 - Industrial cleaning
- 3 - Filtration system




Specification

Model No.	Output		Inlet		Outlet		Pass Solid		Max Flow(LPM)	LPM Flow @ Head				Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	W	mm	inch	mm	inch	Dia(mm)	5M		10M	15M	20M	25M			
SW-60	1/2	400	32	1-1/4"	25	1"	3	120	110	85	35	-	17	315 x 213 x 218	11	
SW-120(S)	1 1/4	1000	32	1-1/4"	25	1"	3	140	138	135	125	110	65	28	360 x 245 x 275	15.5
SW-250(S)	2 1/2	1850	40	1-1/2"	32	1-1/4"	3	300	290	275	260	235	180	30	366 x 213 x 253	20

Remarks: Model No. ends with "S" is included with stainless steel strainer for hot water.

Dimension

Model	Dimension										
	W	L	L1	L2	H	H1	H2	DNA	DNM		
SW-60	mm	mm	mm	mm	mm	mm	mm	mm	mm		
SW-120	213	140	315	138	49	218	232	110	G1 1/4	G1	
SW-120T											
SW-120S	213	140	315	138	49	218	232	110	G1 1/4	G1	
SW-120ST											
SW-250											
SW-250T	213	140	354	138	49	255	222	110	G2	G1 1/2	
SW-250S											
SW-250ST											

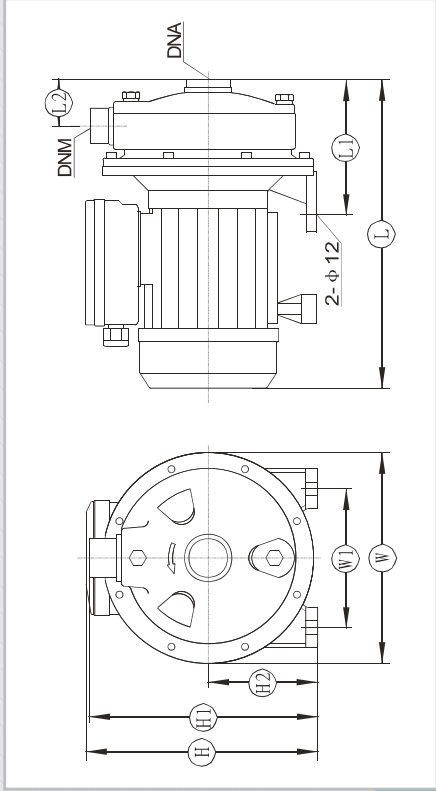

Curve

