

Dimension

Dimension								
Model	L	L1	L2	L3	W	W1	H	H1
	mm	mm	mm	mm	mm	mm	mm	mm
SWO-220(T)	378	255	123	82	193	190	242	125
SWO-320(T)	413	255	158	82	193	190	242	125
SWO-420(T)	430	255	175	82	193	190	242	125

SWO

OPEN IMPELLER CENTRIFUGAL PUMP

- Liquid temperature : 0~70°C / 32~158°F
- HP range : 2~4HP / 1.5~3KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection class : IP55
- Maximum suction : 2M

Features

- 1 · All the material is stainless steel. No rusty issue.
- 2 · Stainless steel open impeller & High head.
- 3 · It can endure light acid and alkali.

Applications


- 1 · The environment containing suspended solid
- 2 · Water circulating and cleaning system
- 3 · Light PH sites



Specification

Model	Output		Outlet		Pass Solid Dia(mm)	Max Flow (LPM)	LPM Flow @ Head						Max Head (M)	Weight (kg)
	HP	KW	mm	inch			7M	8.5M	9.5M	10.5M	11.5M	12.5M		
SWO-60(T)	1/2	0.4	25	1"	3	105	100	83.3	66.7	50	33.3	-	11	7
							5M	6M	7.5M	10M	11.5M	12M		
SWO-120(T)	1.5	1.3	50	2"	8	430	400	380	300	200	100	65	13	16
Model	Output		Outlet		Pass Solid Dia(mm)	Max Flow (LPM)	LPM Flow @ Head						Max Head (M)	Weight (kg)
	HP	KW	mm	inch			4M	6M	8M	10M	12M	14M		
SWO-220(T)	2	1.5	50	2"	8	570	550	500	430	330	210	210	14	20
SWO-320(T)	3	2.2	50	2"	8	660	640	610	560	490	400	270	16	23
SWO-420(T)	4	3	50	2"	8	730	710	685	650	610	560	480	20	26

Remarks: "T" is means three phase

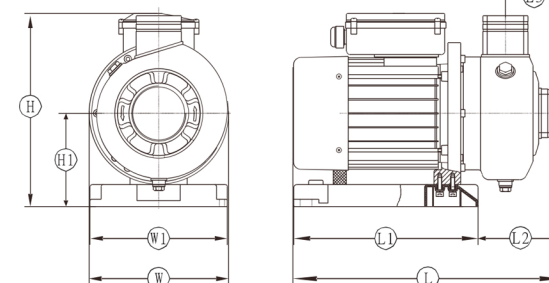

Curve

